


Ricoh C6004 Multifunction Printer Setup Documents – Mac OS X

Download printer driver at <https://www.ricoh.ca/en/support-and-download>

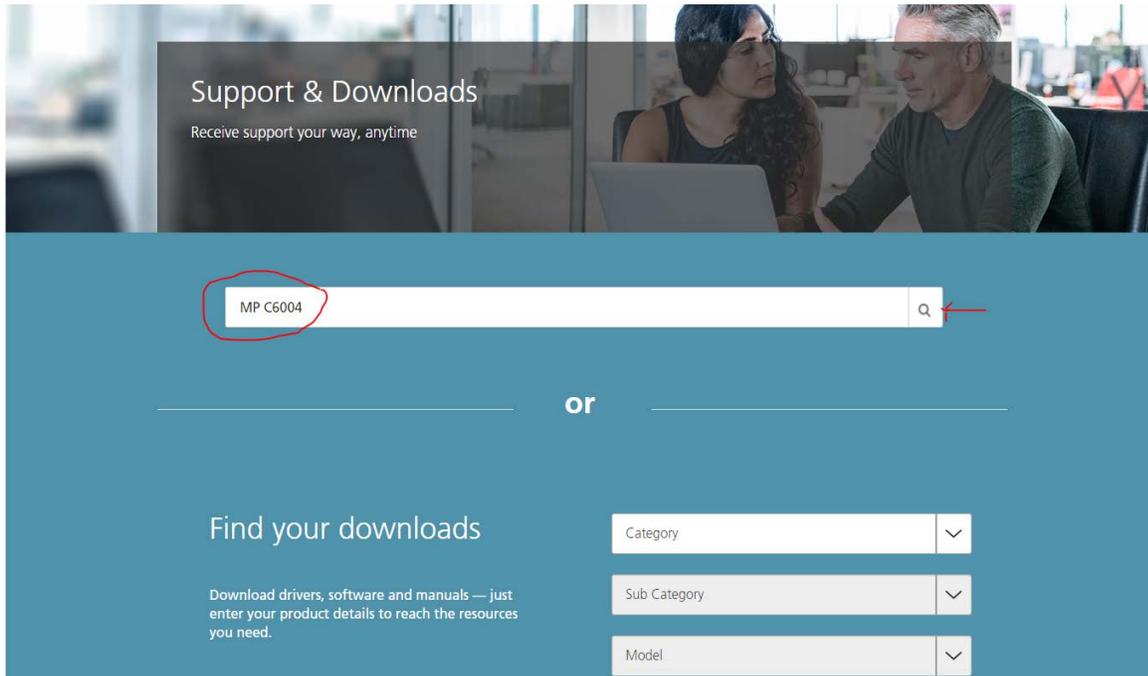

Support & Downloads
Receive support your way, anytime

MP C6004

or


Find your downloads

Download drivers, software and manuals — just enter your product details to reach the resources you need.

Category

Sub Category

Model

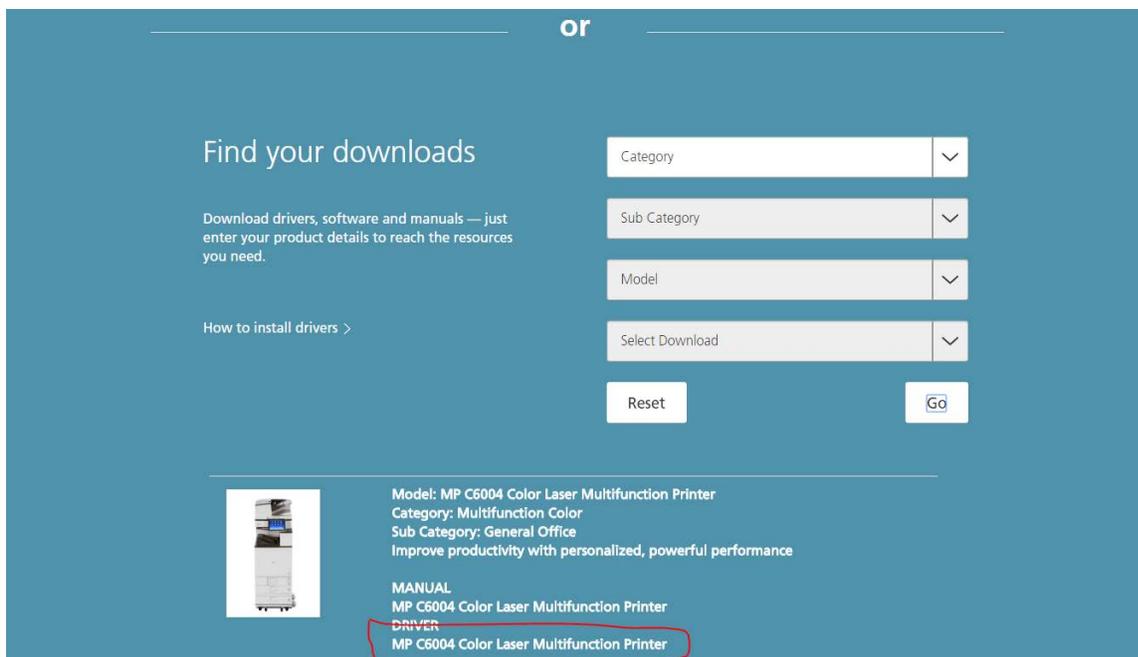

or

Find your downloads

Download drivers, software and manuals — just enter your product details to reach the resources you need.

How to install drivers >

Category

Sub Category

Model

Select Download

Reset

Go

Model: MP C6004 Color Laser Multifunction Printer
Category: Multifunction Color
Sub Category: General Office
Improve productivity with personalized, powerful performance

MANUAL
MP C6004 Color Laser Multifunction Printer
DRIVER
MP C6004 Color Laser Multifunction Printer

MP C4504/C6004 series

Sign up : Software Release Notifications Important Notice **Important**

Your OS

Please choose your OS



Choose your OS

Select driver language

Change OS

Select driver language

- Windows
- Mac OS X
 - Mac OS X 10.11 (OS X El Capitan)
 - Mac OS X 10.10 (OS X Yosemite)
 - Mac OS X 10.9 (OS X Mavericks)
 - Mac OS X 10.8
 - Mac OS X 10.7
- Windows Server
- Firmware / Other OS

Select the OS of your computer and download the PPD Installer.

Mac OS X 10.11 (OS X El Capitan)

Printer Driver

PPD Installer Ver 1.2.0.0 Released Date: 06/14/2016 **New!**

[Download](#)
(File Size : 1,460 KB)


This PPD installer is used to install a PPD (Postscript Printer Description) file on Mac OS X. PPD files contain descriptions of printer capabilities such as paper sizes, number of input trays and duplexing. Once the PPD file is installed on the system using the PPD installer, the PS driver that comes bundled with Mac OS X can use the [History](#)

Mac OS X 10.10 (OS X Yosemite)

Mac OS X 10.9 (OS X Mavericks)


Mac OS X 10.8

Mac OS X 10.7

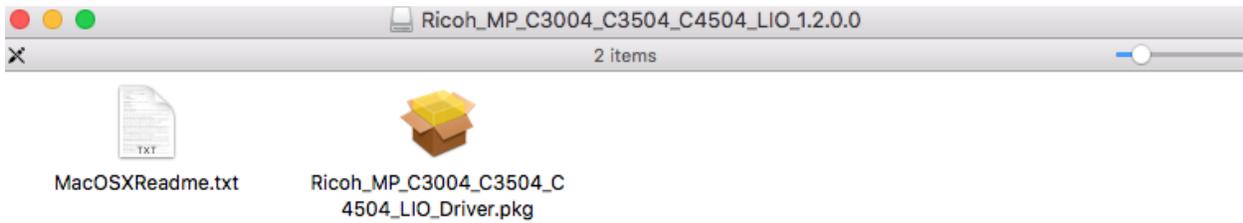

Follow the instructions. Install the printer driver.

After installation of the driver software, go to **System Preferences** and select **Printers and Scanners**.

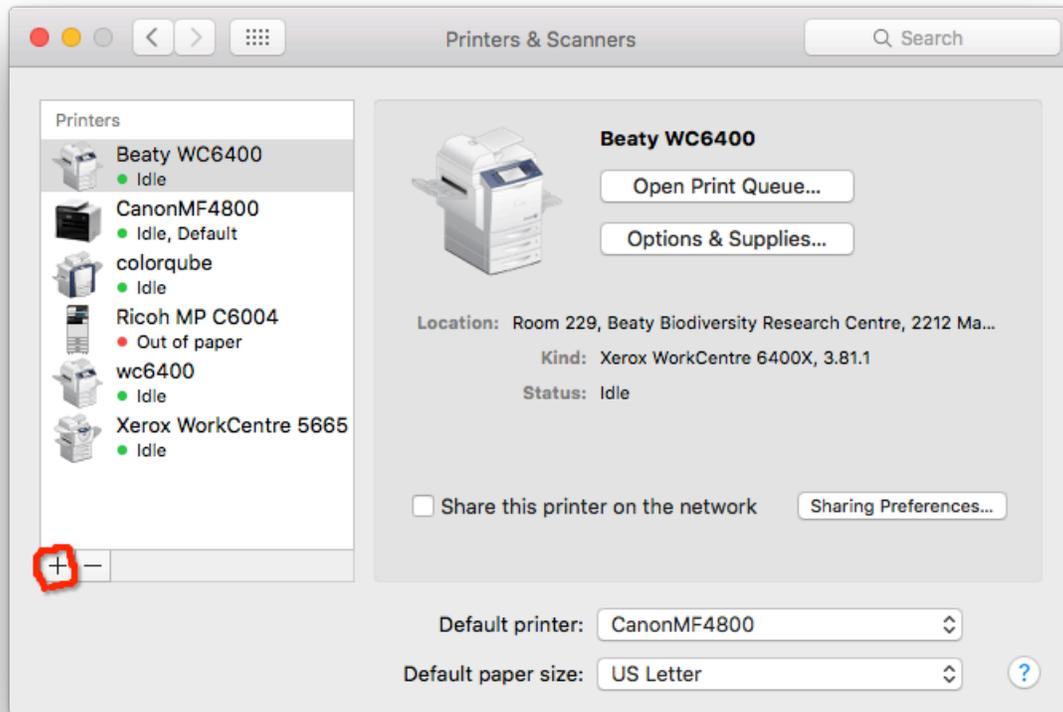


Click the [+] button.

If [Add Other Printer or Scanner...] or [Add Printer or Scanner...] appears, click it.

Click [Default].

Select the printer that has "Bonjour" indicated in the [Kind] column.

If the printer name is not displayed, select the icon that corresponds to your network environment (TCP/IP, etc.).

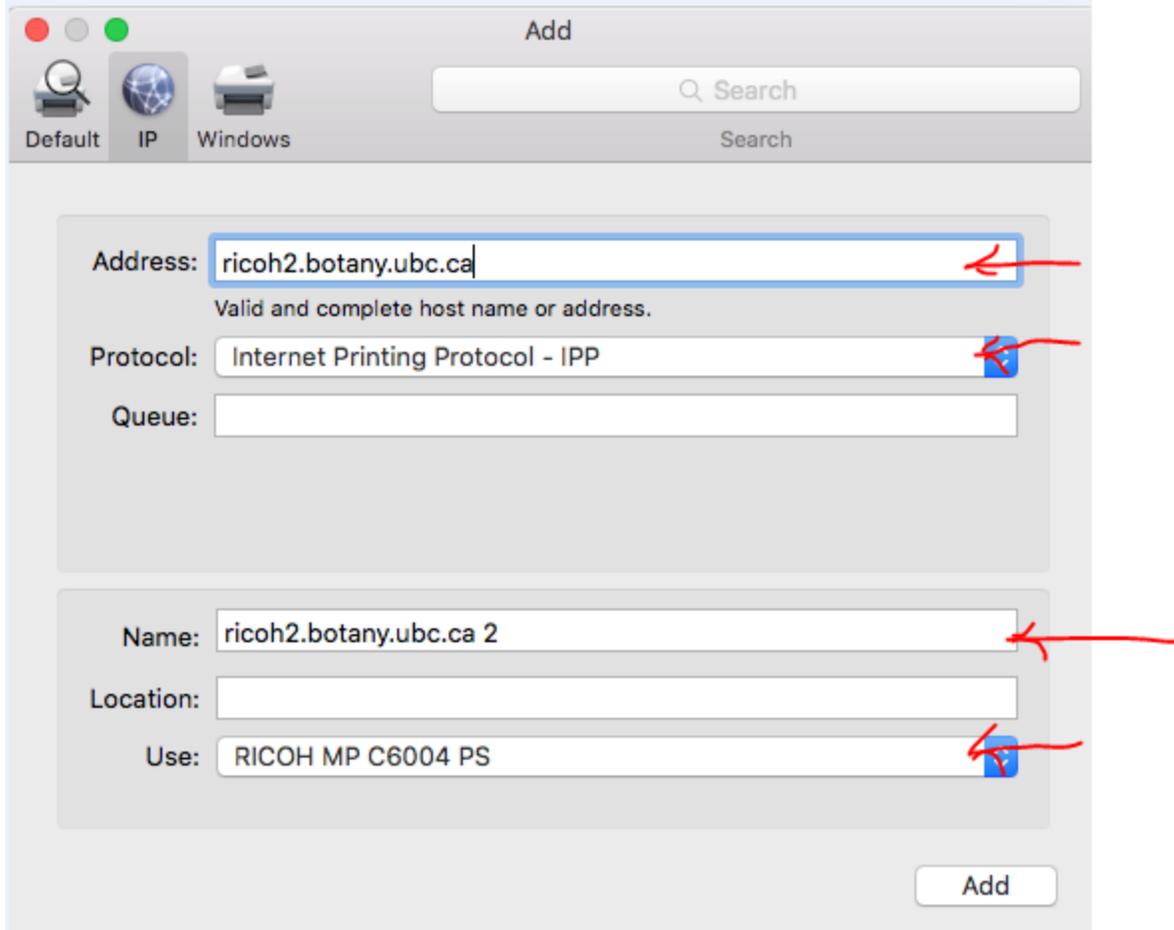


In the Address field, enter “ricoh2.botany.ubc.ca” for the Ricoh printer in BioSci building.


Enter “ricoh1.botany.ubc.ca” for the Ricoh printer in Wesbrook building.

In Protocol field, select “Internet Printing Protocol – IPP”

If the printer driver is not showed up in the Use field. Click the drop down arrow and click “**Select Software...**”

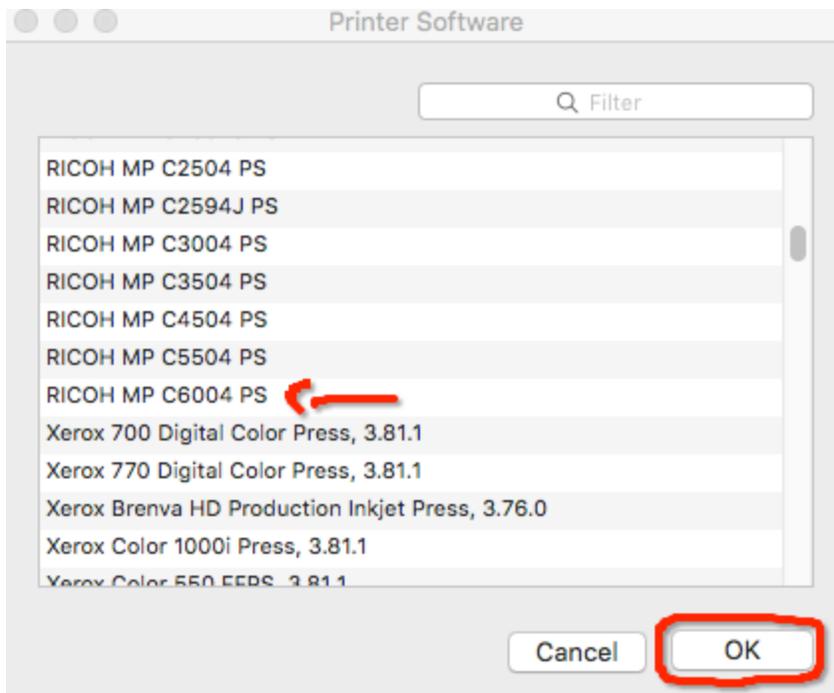

Select "RICOH MP C6004 PS" from the list. Click **OK**.

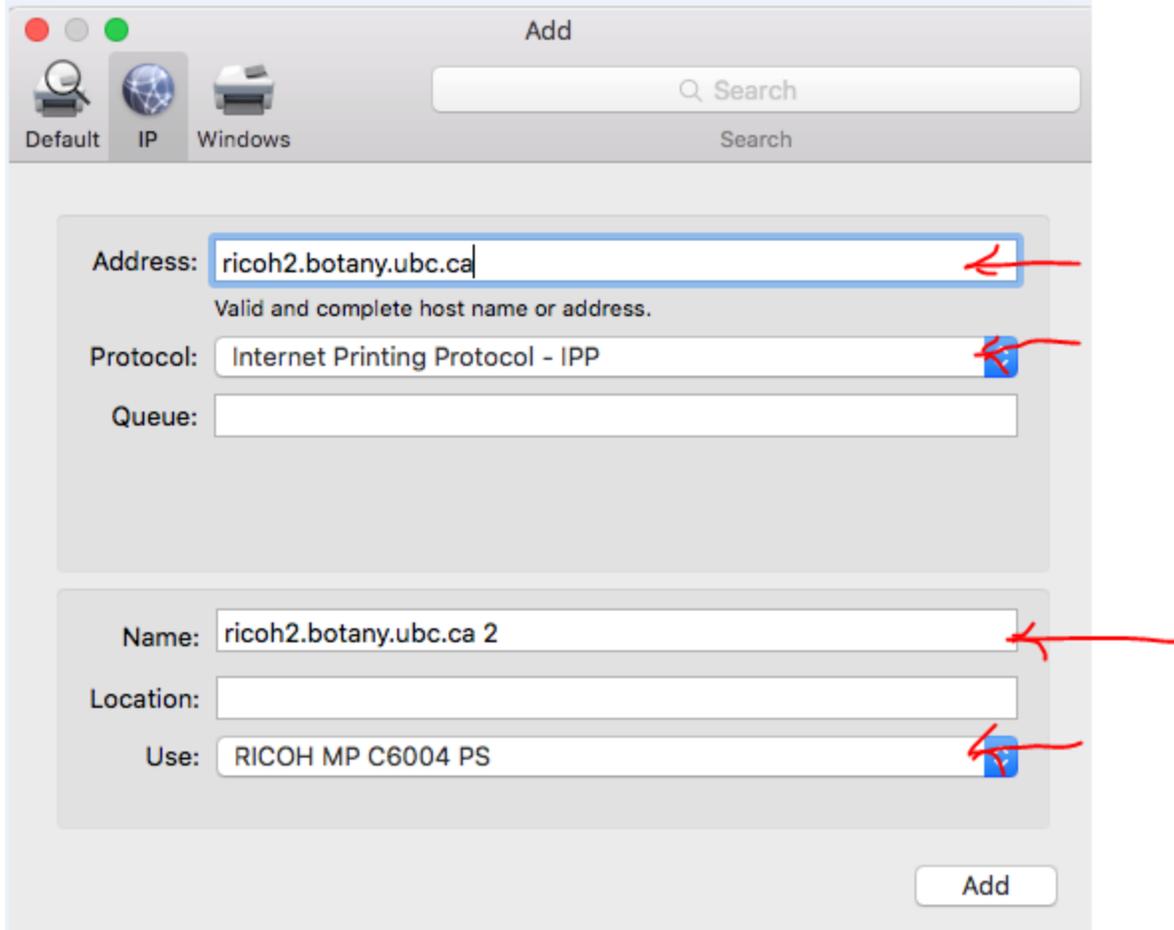

The Name field can be modified to any name you want to name the printer. E.g.: Ricoh-BioSci

Click [Add].

If the option settings need to be configured, click [Configure...] in the dialog box that appears, and then configure the option settings.

Quit System Preferences.

Print

Printer: ▲ Ricoh MP C6004

Presets: Default Settings

Copies: 1 Two-Sided

Pages: All
 From: 1 to: 1

Paper Size: US Letter 216 by 279 mm

Orientation:   Scale: 100 %

Job Log

User ID:

Job Type: Normal Print

File Name:

Password:

Enable User Code

User Code:

Set Print Time

Time: 12:00 AM


Folder Number: 0

Folder Password:

? PDF Hide Details Cancel Print


Check the box besides Enable User Code.

Enter your employee ID in the User Code field.

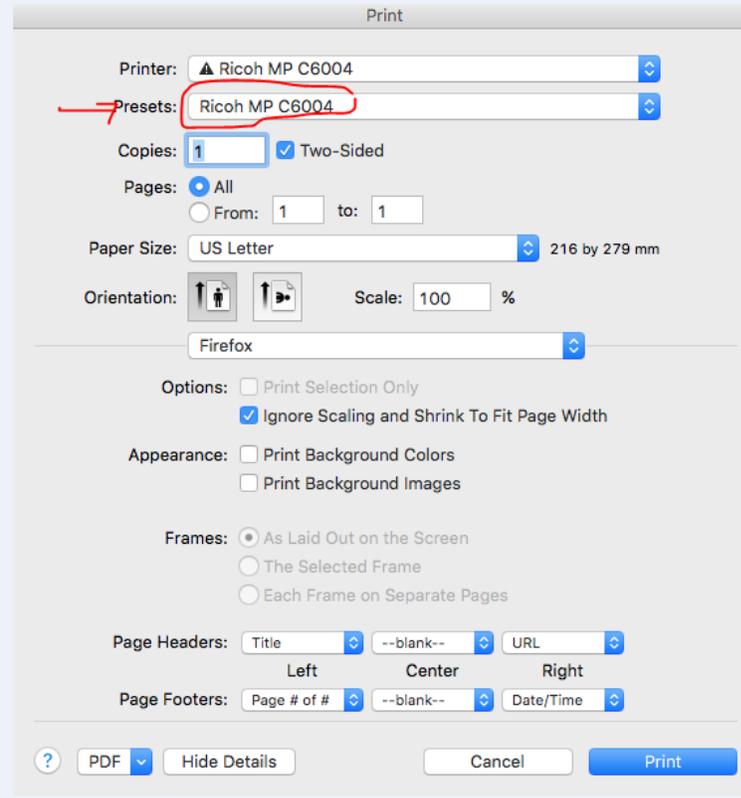


Save print setting as a preset for the Ricoh printer.

To enable the Staple and Hole Punch feature:

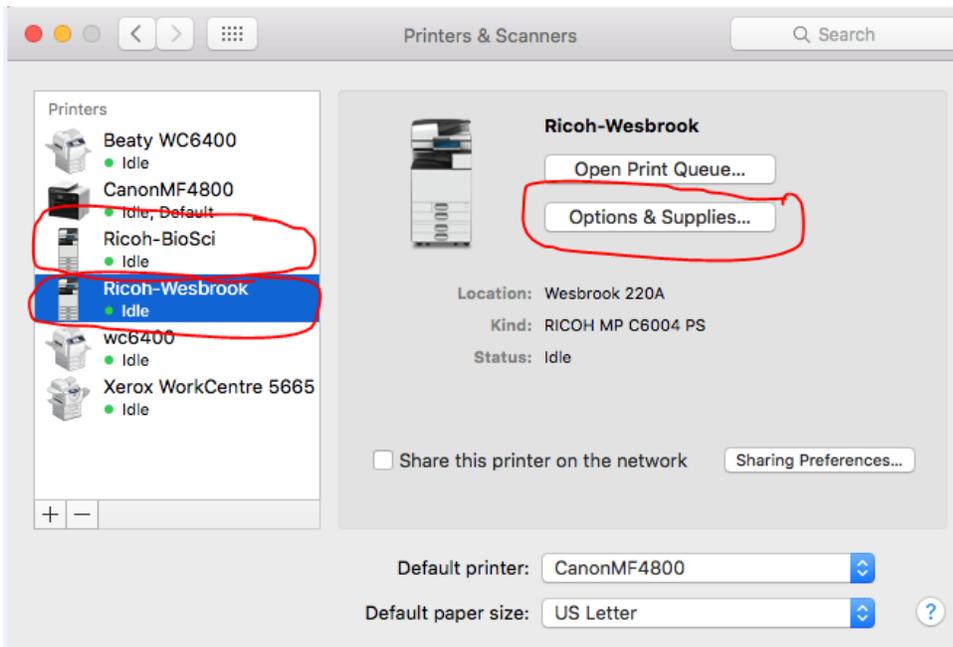


Select the Ricoh printer from the Printer list. Click **Options & Suppliers...**

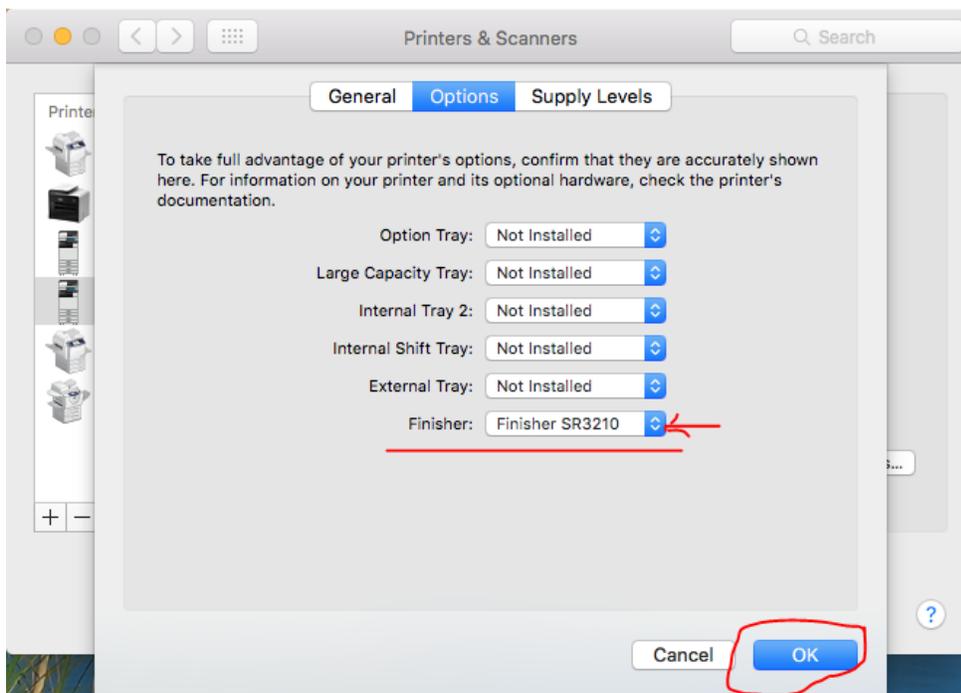

Click the second tab on top, **Options**. Choose "**Finisher SR3210**" in the "**Finisher:**" drop down box.


To use the Staple and Hole Punch feature:

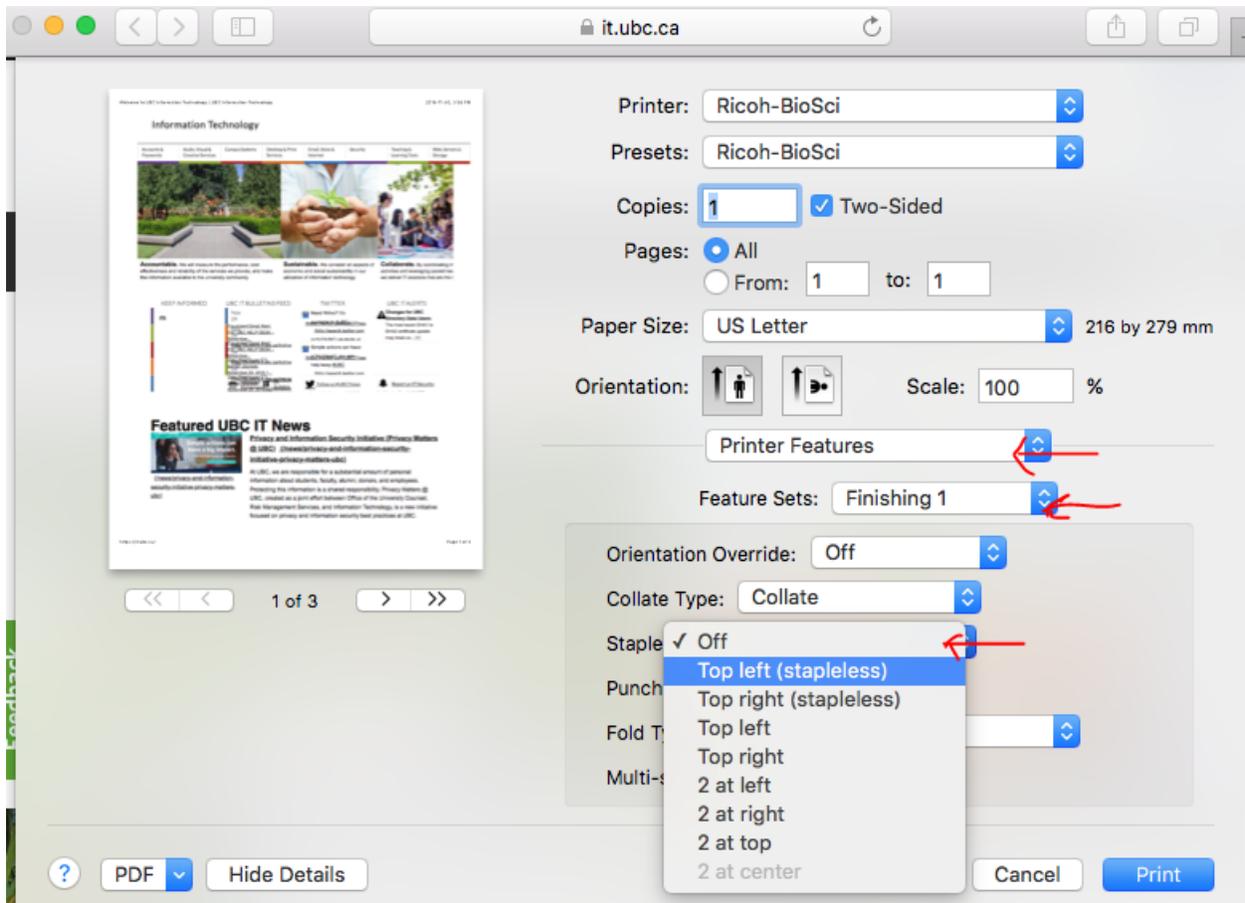

From the Print menu, select **Printer Features**.

Select **Finishing 1** in Feature Sets box.

Choose the preferred staple setting in the **Staple** drop down box.

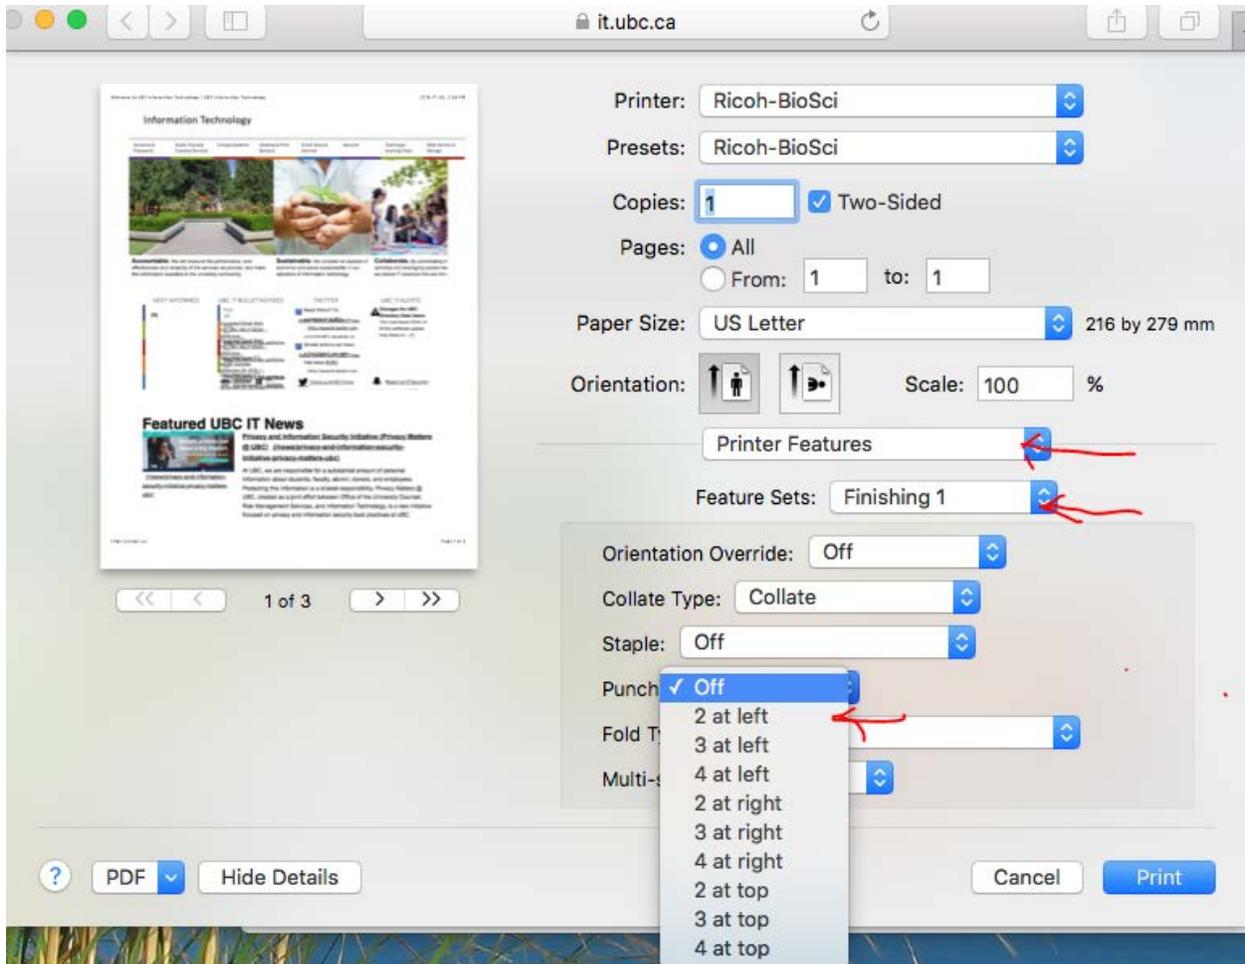

From the Print menu, select **Printer Features**.

Select **Finishing 1** in Feature Sets box.

Choose the preferred hole punch setting in **Punch** drop down box.